

Ningbo Junsheng Electronics Co.,Ltd.

4.00"(101.60mm)Single Digit 7 Segment Display

Features:

- *Ultra segment intensity
- *Wide viewing angle
- *Range of colors
- *Gray/Black face White segment
- *RoHS compliant

Available option:

- *Alternative face and segment color
- *Alternative font
- *Cropped terminal pins
- *Available emitting color
- *Low current version

Electro/Optical Characteristics If=20mA Ta=25°C

Part Number Common Cathode	Part Number Common Anode	Emitting Colors	Peak Wavelength	Forward Voltage V		Luminous Intensity Iv	
				Typ.	Max.	Min.	Typ.
JSD-40011IURUG	JSD-40011JURUG	AlGaInP/GaAs Ultra Red	635	2.00	2.50	160.00	320.00
		AlGaInP/GaAs Yellow Green	574	2.10	2.50	80.00	160.00
JSD-40011IUEPG	JSD-40011JUEPG	AlGaInP/GaAs Super Red	625	2.00	2.50	320.00	640.00
		InGaN/SiC Pure Green	525	3.30	3.80	1200.00	1600.00
JSD-40011IUEUB	JSD-40011JUEUB	AlGaInP/GaAs Super Red	625	2.00	2.50	320.00	640.00
		InGaN/SiC Ultra Blue	470	3.30	3.80	320.00	640.00
Units			nm	V		mcd	

Maximum Ratings Ta=25°C (Derate above 25°C)

Characteristic	Test Condition	Symbol	UR	UE	UG	UB	PG		Units
Pulse Forward Current Per Seg.	1/10 duty cycle 0.1ms Pulse width	I _{FP}	100	100	100	100	100		mA
DC Forward Current Per Seg.		I _F	30	30	30	30	30		mA
Reverse Current Per Seg.	V _R =5V	I _R	10	10	10	10	10		μA
Power Dissipation		P _D	36	40	44	66	66		mW
Operating Temperature		T _{OPR}	-40 to +80						°C
Storage Temperature		T _{TSG}	-40 to +85						°C
Lead soldering temperature	1.60mm from body maximum 3 seconds		260						°C

Checked

Becky Sun

Approved

Jason Lou

Date


Aug/14/2013

PAGE 1 /2

Ningbo Junsheng Electronics Co.,Ltd.

4.00"(101.60mm)Single Digit 7 Segment Display


PACKAGE DIMENSION

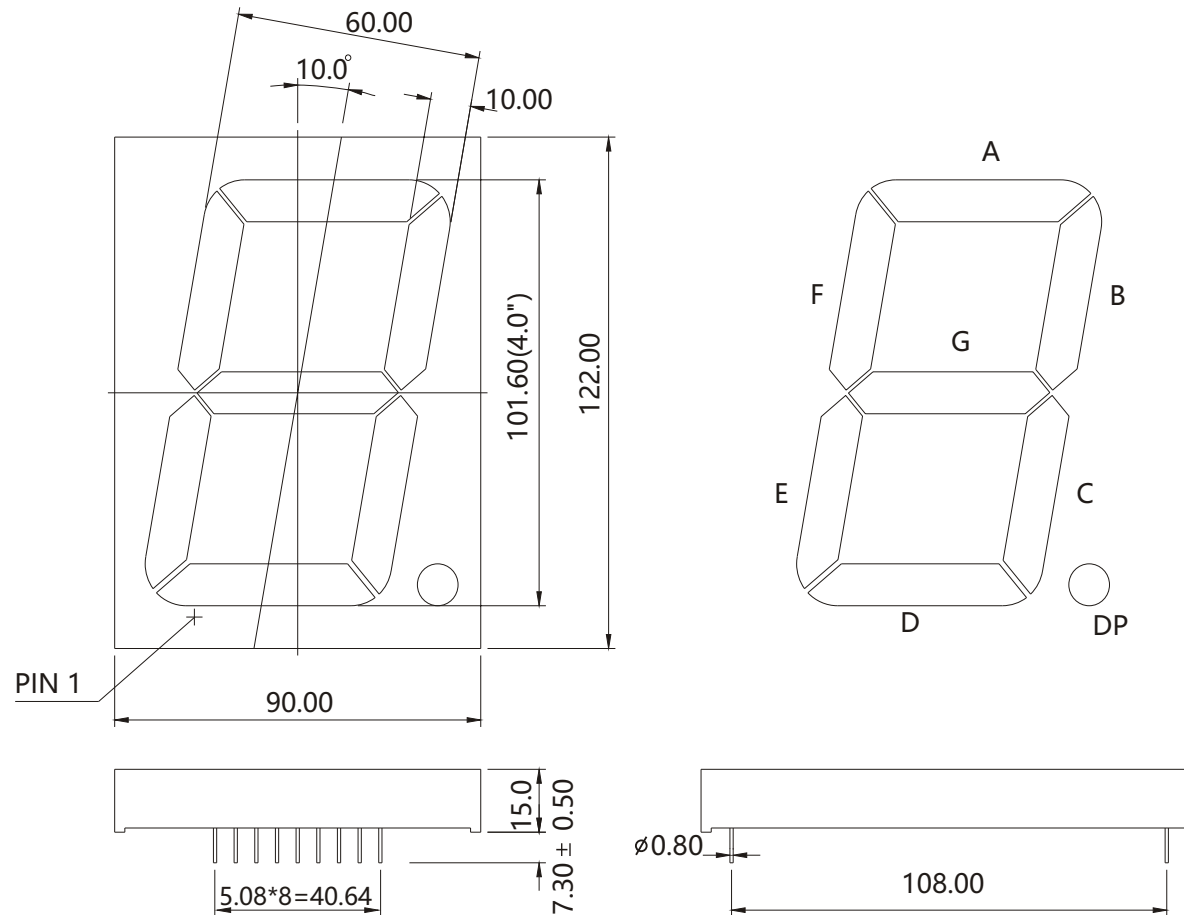


Tolerance $\pm 0.25\text{mm}$ unless stated

INTERNAL CIRCUIT DIAGRAM

Common Cathode JSD-40011Lxx

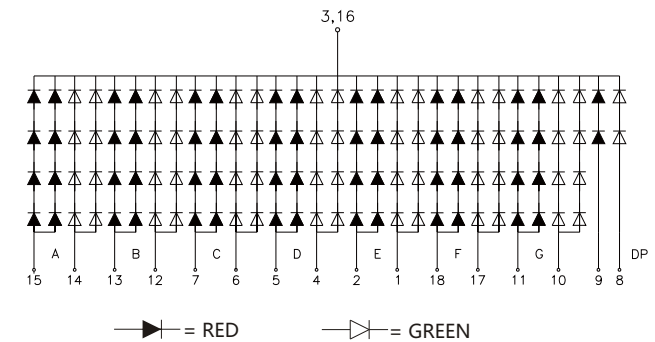

Common Anode JSD-40011Jxx

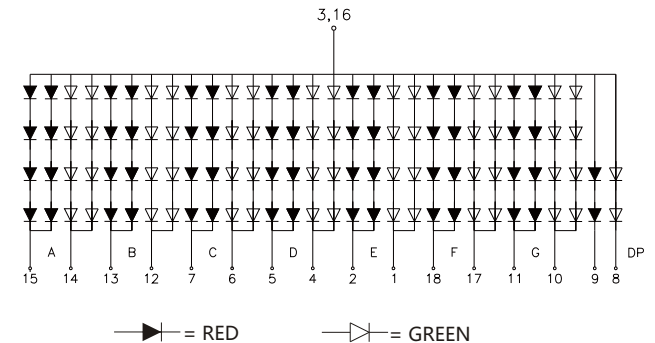

Checked

Becky Sun

Approved

Jason Lou

Date

Aug/14/2013

PAGE 2 /2