

Ningbo Junsheng Electronics Co.,Ltd.

2.30"(56.80mm)Single Digit 7 Segment Display

Features:

- *Ultra segment intensity
- *Wide viewing angle
- *Range of colors
- *Gray/Black face White segment
- *RoHS compliant

Available option:

- *Alternative face and segment color
- *Alternative font
- *Cropped terminal pins
- *Available emitting color
- *Low current version

Electro/Optical Characteristics If=20mA Ta=25°C

Part Number Common Cathode	Part Number Common Anode	Emitting Color	Peak Wavelength	Forward Voltage V _F		Luminous Intensity I _v	
				Typ.	Max.	Min.	Typ.
JSD-23011KUR	JSD-23011LUR	AlGaInP/GaAs Ultra Red	635	2.00	2.50	60.00	120.00
JSD-23011KUE	JSD-23011LUE	AlGaInP/GaAs Super Red	625	2.00	2.50	120.00	240.00
JSD-23011KUA	JSD-23011LUA	AlGaInP/GaAs Ultra Amber	605	2.00	2.50	120.00	180.00
JSD-23011KUY	JSD-23011LUY	AlGaInP/GaAs Ultra Yellow	590	2.00	2.50	120.00	180.00
JSD-23011KUG	JSD-23011LUG	AlGaInP/GaAs Yellow Green	574	2.10	2.50	30.00	60.00
JSD-23011KPG	JSD-23011LPG	InGaN/SiC Pure Green	525	3.30	3.80	450.00	600.00
JSD-23011KUB	JSD-23011LUB	InGaN/SiC Ultra Blue	470	3.30	3.80	120.00	240.00
JSD-23011KUW	JSD-23011LUW	InGaN/SiC Ultra White	X-0.31/Y-0.31	3.30	3.80	600.00	1200.00
Units			nm	V		mcd	

Maximum Ratings Ta=25°C (Derate above 25°C)

Characteristic	Test Condition	Symbol	UR	UE	UA	UY	UG	PG	UB	UW	Units
Pulse Forward Current Per Seg.	1/10 duty cycle 0.1ms Pulse width	I _{FP}	100	100	100	100	100	100	100	100	mA
DC Forward Current Per Seg.		I _F	30	30	30	30	30	30	30	30	mA
Reverse Current Per Seg.	V _R =5V	I _R	10	10	10	10	10	10	10	10	μA
Power Dissipation		P _D	36	40	42	42	44	66	66	66	mW
Operating Temperature		T _{OPR}	-40 to +80								°C
Storage Temperature		T _{TSG}	-40 to +85								°C
Lead soldering temperature	1.60mm from body maximum 3 seconds		260								°C

Checked

Becky Sun

Approved

Jason Lou

Date




Aug/14/2013

PAGE 1 /2

Ningbo Junsheng Electronics Co.,Ltd.

2.30"(56.80mm)Single Digit 7 Segment Display


PACKAGE DIMENSION

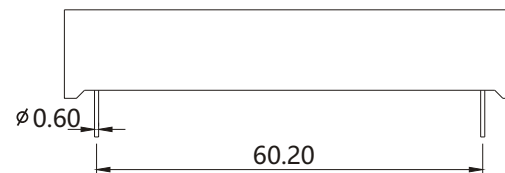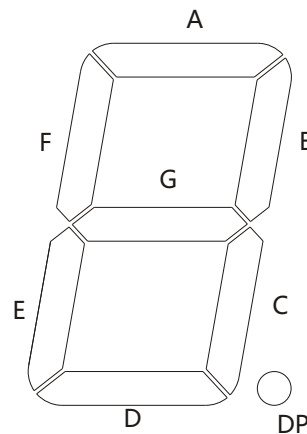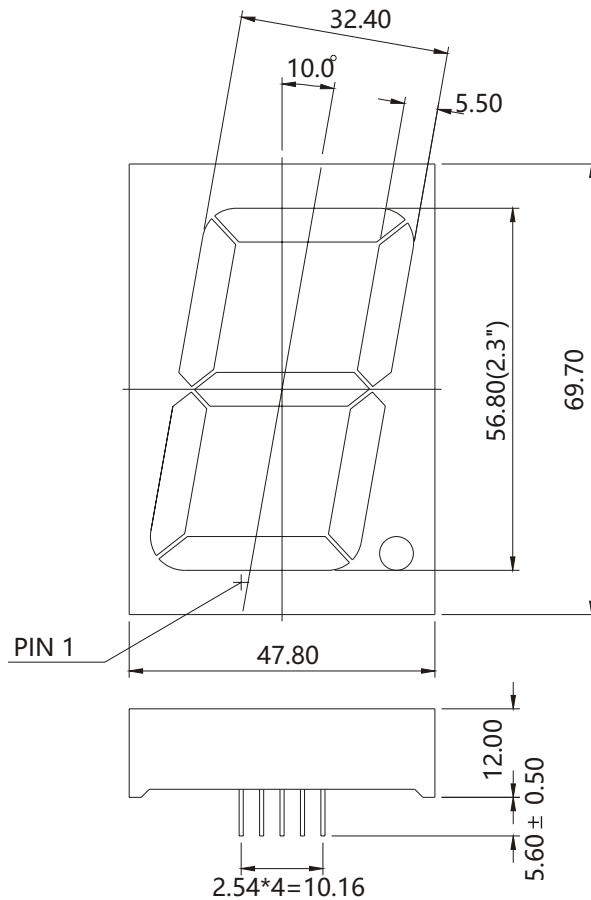


Tolerance $\pm 0.25\text{mm}$ unless stated

INTERNAL CIRCUIT DIAGRAM

Common Cathode JSD-23011Kx

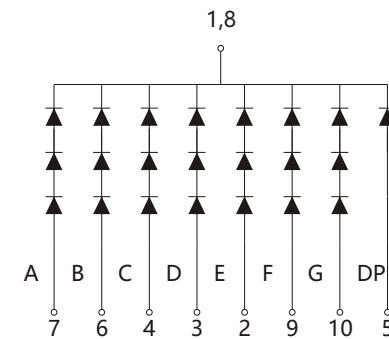

Common Anode JSD-23011Lx

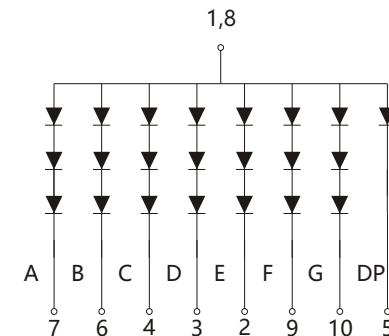

Checked

Becky Sun

Approved

Jason Lou

Date

Aug/14/2013

PAGE 2 /2