

Part No.: JSL-801UBC

Features:

- Single color
- High bright output
- Low power consumption
- High reliability and long life
- Compliance with EU REACH

Descriptions:

- Emitting Color: Super Bright Blue
- Device Outline: 8mm Round With Flange Type
- Lens Type: Water Clear
- The LED lamps are available with different colors, intensities.

Application:

- Circuit board.
- Indicators.
- Computer.
- Commercial Lighting use.




JSTRONIC

Ningbo Junsheng Electronics Co.,LTD.

Part No.: **JSL-801UBC**

Package Dimension:

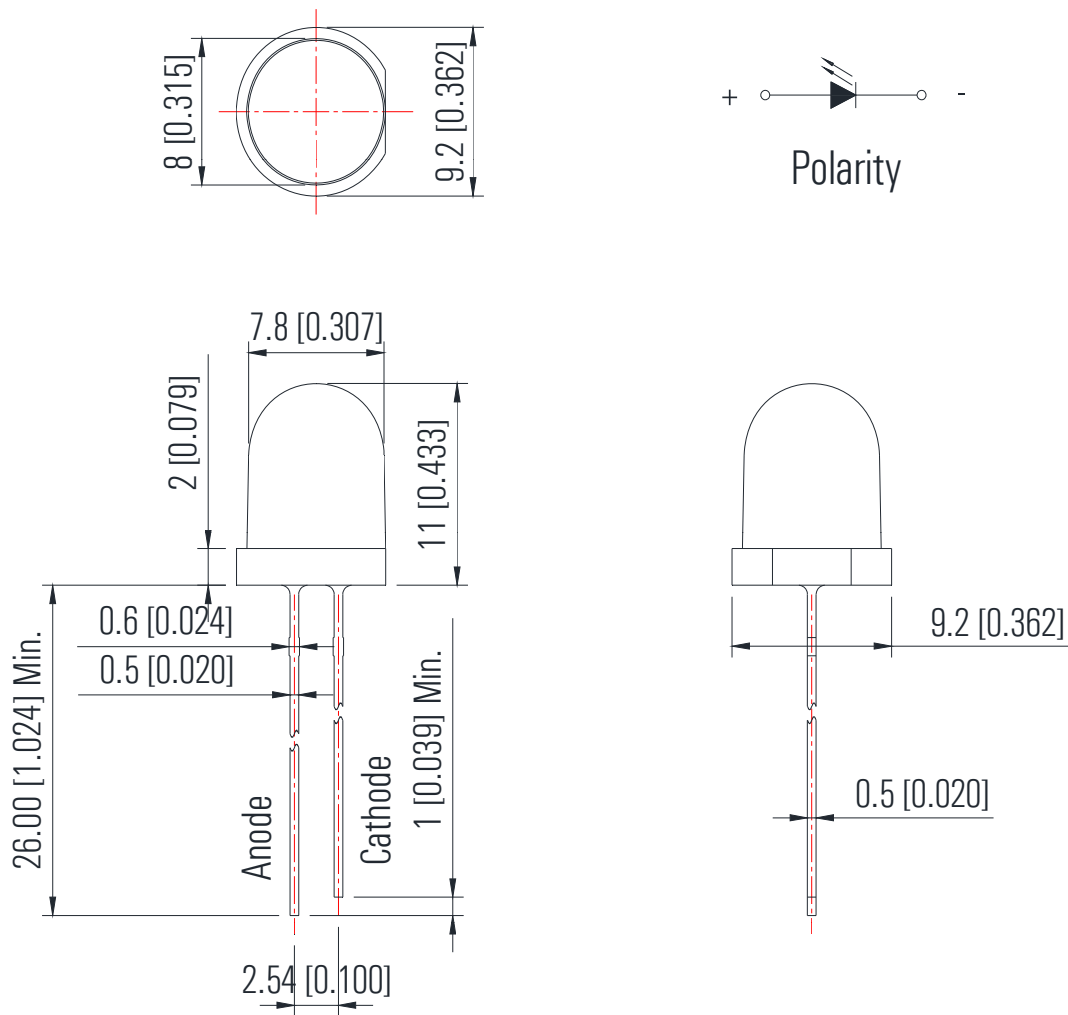

Notes:

1. All dimensions are millimeters/单位: mm.
2. Tolerance is +/-0.25mm unless otherwise noted/
没有标注的公差均为±0.25mm

Part No.: JSL-801UBC

Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Test Condition	Values		Unit
			Min.	Max.	
Reverse Voltage	V _R	I _R = 30 μA	----	5	V
Forward Current	I _F	----	----	25	mA
Power Dissipation	P _d	----	----	85	mW
Pulse Current	I _{peak}	Duty=0.1mS, 1kHz	----	100	mA
Operating Temperature	T _{opr}	----	-40	+85	°C
Storage Temperature	T _{str}	----	-40	+85	°C

Electrical and optical characteristics (Ta = 25°C)

Parameter	Symbol	Test Condition	Values			Unit
			Min.	Typ.	Max.	
Forward Voltage	V _F	I _F =20mA	2.7	3.0	3.4	V
Reverse Current	I _R	V _R =5V	----	----	30	μA
Dominate Wavelength	λ _d	I _F =20mA	----	470	----	nm
Peak Wavelength	λ _p	I _F =20mA	----	468	----	nm
Spectral Line half-width	Δλ	I _F =20mA	----	25	----	nm
Luminous Intensity	I _v	I _F =20mA	4000	6000	----	mcd
Viewing Angle	2θ _{1/2}	I _F =20mA	----	30	----	deg.



JSTRONIC

Ningbo Junsheng Electronics Co.,LTD.

Part No.: JSL-801UBC

Typical electrical/optical characteristic curves:

(25°C Ambient Temperature Unless Otherwise Noted)

