

Ningbo Junsheng Electronics Co.,LTD.

产品承认书			
PRODUCT APPROVED			
(CUSTOMERS) _____			
(CUSTOMER P/N) _____			
(PART NUMBER) <u>JSS-3012Axx</u>			
(DESCRIPTION) <u>0.3 inch common cathode smd display</u>			
(SAMPLE DATE) _____			
Specification	INSPECTION	SAMPLE	OTHERS
(APPROVED BY)	(CHECKED BY)	(PROOFREAD BY)	(PREPARED BY)
Version	Date	Description	Maker
(CUSTOMER VERDICT)			
(OK) ☐		(NG) ☐	
(APPROVED BY):		(APPROVED DATE):	
(IMPROVED ADVICE):			

REMARK: FOR OFFERING THE BEST SERVICE TO CUSTOMER, PLEASE FAX THE DATA TO FACTORY IN TIME


1.DESRIPTION:

- Gray face, White Epoxy
- Common cathode
- Various Emiting ColorColor
- RoHS Compliant

2.FEATURES:



- High intensity and reliability
- High quality, Low power requirement
- IC compatible , Easy assembly
- ESD1000V

3.PACKAGE DIMENSION:

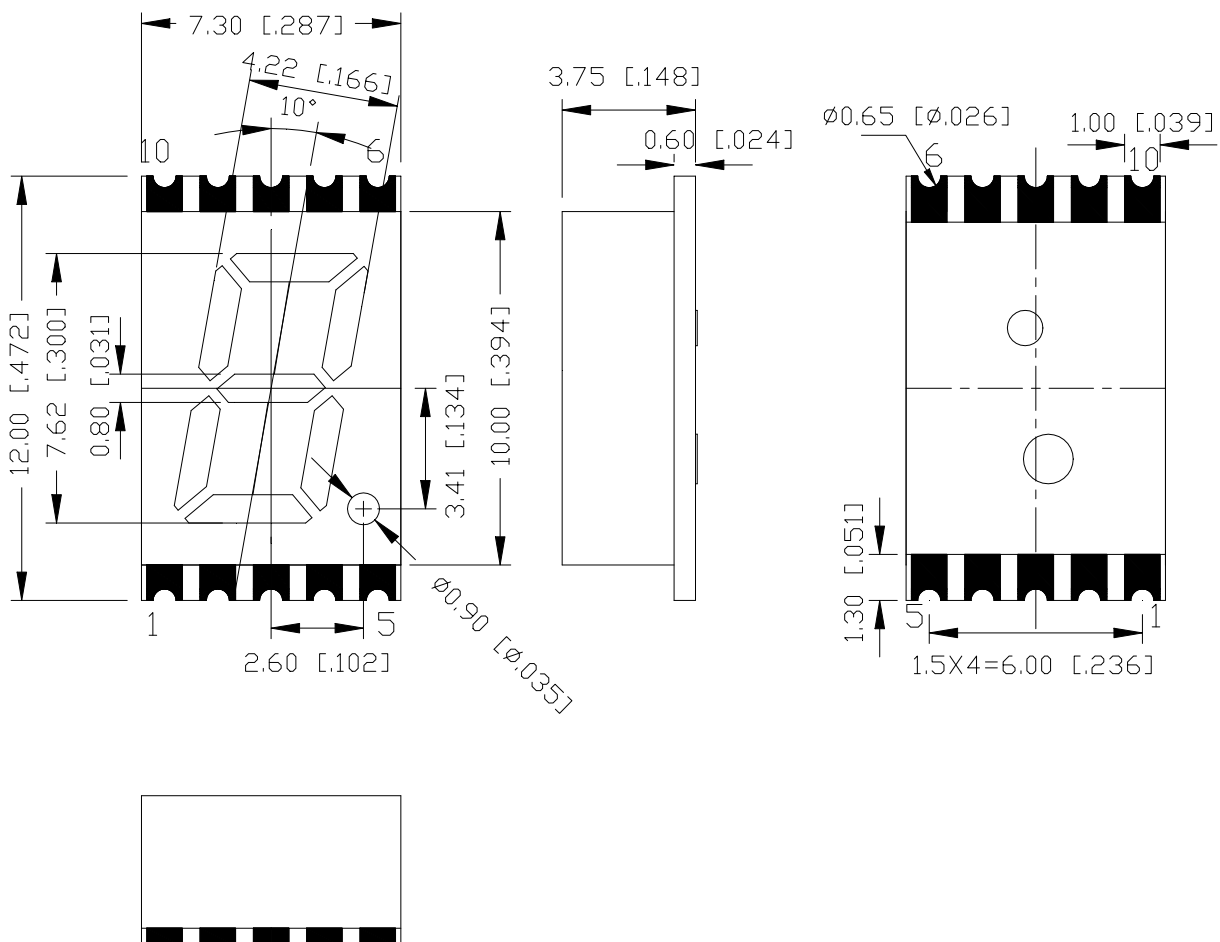

NOTES: All dimensions are in millimeters (inches) tolerance are $\pm 0.25\text{mm}$ (0.010) unless otherwise noted

4.INTERNAL CIRCUIT DIAGRAM

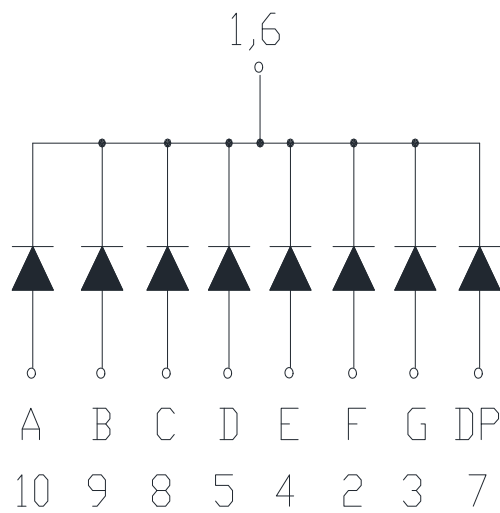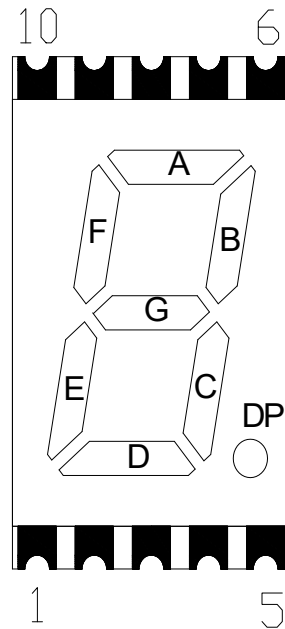

Common Cathode


5.ABSOLUTE MAXIMUM RATINGS AT T_a=25°C:

Items	Symbol	Absolute maximum Rating	Unit
Forward Current(DC)	IF	20	mA
Power Dissipation	W	60	Mw
Peak Forward Current*	IFP	100	mA
Reverse Voltage	VR	5	V
Operation Temperature	Topr	-40+85	°C
Storage Temperature	Tstg	-40+100	°C
Lead Soldering Temperature	Tsol	Max .260 °C for 3 sec Max. (3mm from the base of the epoxy bulb)	


6.ELECTRICAL/OPTICAL CHARACTERISTICS AT T_a=25°C:

Part No	Emitting Color	Chip Material	Forward Voltage (V)		Luminous Intensity (mcd)		Peak Wave Length(λP) nm	
			IF=10mA					
Common Cathode			Typ	Max	Min	Typ	Typ	Max
JSS-3012AUR-21	Ultra Red	AlGaInP	2.0	2.5	20	40	630	640
JSS-3012ASR-21	Super Red	AlGaInP	2.0	2.5	40	80	620	625
JSS-3012AUY-21	Yellow	AlGaInP	2.0	2.5	40	60	585	595
JSS-3012AUG-21	Green	AlGaInP	2.0	2.5	10	20	570	575
JSS-3012AUA-21	Amber	AlGaInP	2.0	2.5	40	60	600	610
JSS-3012AUB-21	Blue	InGan	3.0	3.5	40	60	460	470
JSS-3012APG-21	Pure Green	InGan	3.0	3.5	80	150	520	525
JSS-3012AUW-21	White	InGan	3.0	3.5	100	200	X0.30/Y0.30	

7.Recommended Soldering Pattern:

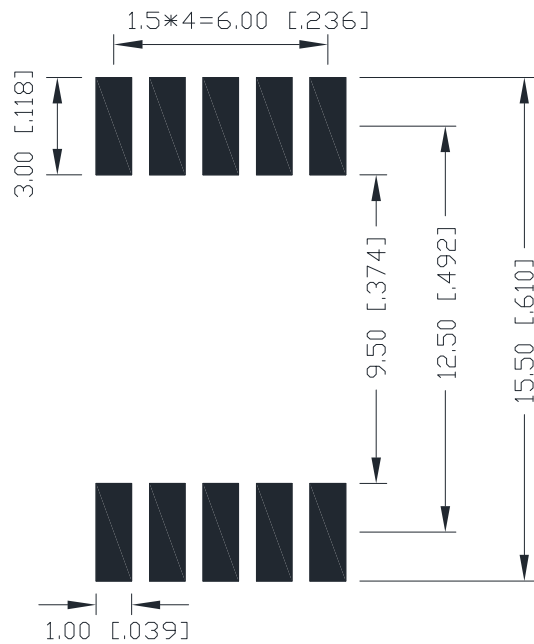


8、推荐的 SMT 焊接曲线 Recommended SMT condition:

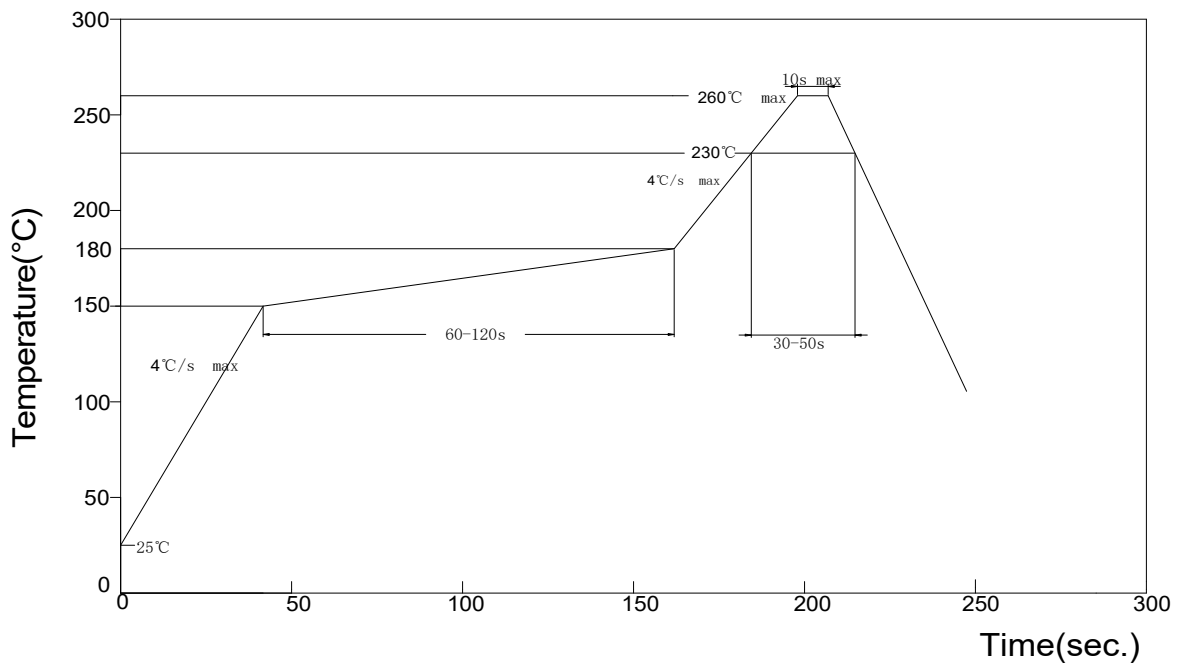


NOTES:

- 1.We recommend the reflow femperture 245°C ($\pm 5^{\circ}\text{C}$) 。 The maximun soldering temperature should be limited to 260°C 。
- 2.Don't cause stress to the epoxy resin while it is exposed to high temperature。
- 3.Number of reflow process shall be 2 times or less.

9.Reel Dimension:

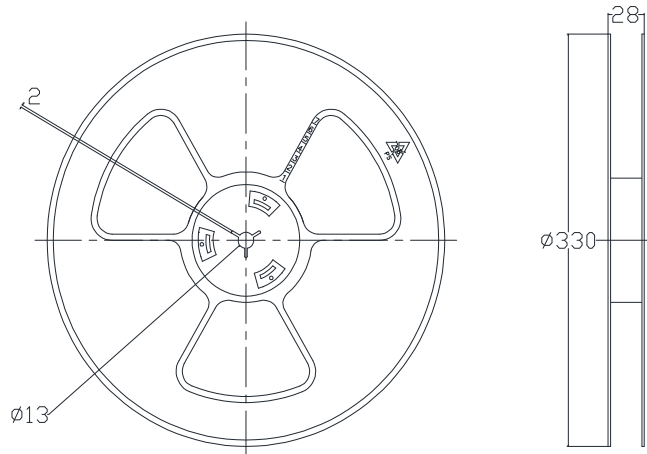

10.Packing and Lable Specifications:

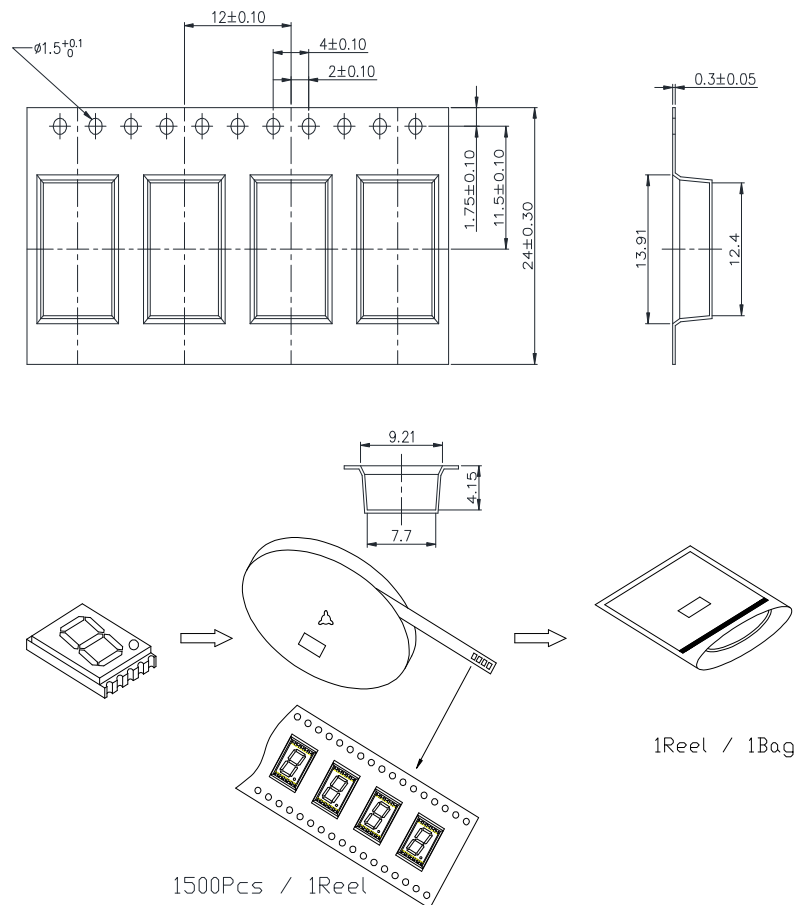

Note: The specifications are subject to change without notice. Please contact us for updated information.