



JSL-303 Series (3mm round blinking LED diode)

Features:

1. Standard brightness.
2. General application for indication
3. IC compatible /Low current capability
4. Long life solid state reliability.
5. RoHs compliant.

Electrical and optical characteristics(Ta=25 °c)

Part Number	Dice material And color	Lens color	Peak Wavelength	Pulse Rate (Hz) Typ	Vf(V) Typ	Iv(mcd)			Viewing Angle 2 θ 1/2
						Min	Typ	Max	
JSL-303RD-B	GaAlAs/Red	Red Diffused	625nm	1.5Hz	2.5-3.5	100	150	200	40°
JSL-303GD-B	GaP/Green	Green Diffused	570nm	1.5Hz	2.5-3.5	10	20	30	40°
JSL-303YD-B	GaAsP/Yellow	Yellow Diffused	585nm	1.5Hz	2.5-3.5	100	150	200	40°
JSL-303RC-B	GaAlAs/Red	Water Clear	625nm	1.5Hz	2.5-3.5	500	1000	1500	25°
JSL-303GC-B	GaP/Green	Water Clear	570nm	1.5Hz	2.5-3.5	50	80	100	25°
JSL-303YC-B	GaAsP/Yellow	Water Clear	585nm	1.5Hz	2.5-3.5	500	1000	1500	25°
JSL-303BC-B	InGaN/Blue	Water Clear	425nm	1.5Hz	3.5-4.5	700	1300	1800	25°
JSL-303PGC-B	InGaN/Pure Green	Water Clear	525nm	1.5Hz	3.5-4.5	1500	2000	2500	25°
JSL-303UW-B	InGaN/Ultra White	Water Clear	6000K	1.5Hz	3.5-4.5	2000	3000	4000	25°
JSL-303WW-B	InGaN/warm White	Water Clear	3000K	1.5Hz	3.5-4.5	2000	3000	4000	25°




JSL-303Series

Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	UR	UY	UG	UA	UB	BG	PG	UV	UP	UW	WW	Unit
Forward Current	I _F	25	25	25	25	30	30	30	30	30	30	30	mA
Power Dissipation	P _d	60	60	60	60	100	100	100	100	100	100	100	mW
Reverse Voltage	V _R	5											V
Peak Forward Current (Duty 1/10 @1KHZ)	I _{PF}	150											mA
Operation Temperature	T _{OPR}	-40 to +80											°C
Storage Temperature	T _{STG}	-40 to +85											°C

Package configuration:

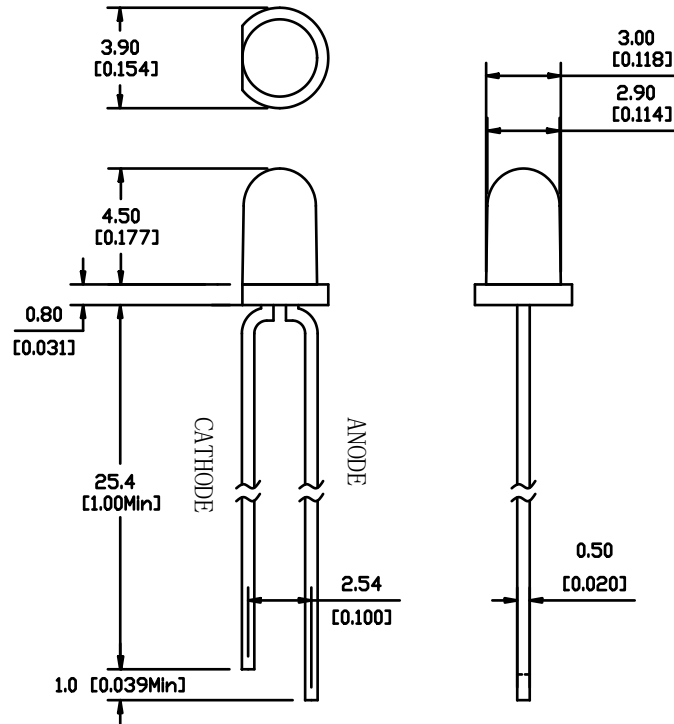

- 1.All dimensions are millimeters (inches)
- 2.Tolerance is ±0.25mm(.010") unless otherwise noted.